



**DA-LITE IS MORE  
THAN PROJECTION SCREENS**


Da-Lite Tripod, Wall &  
Ceiling and Electric Screens



Da-Lite Overhead  
Projectors

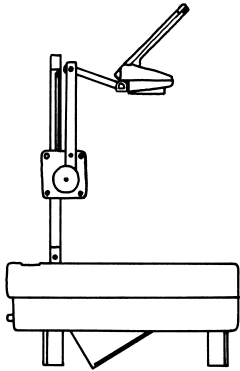

Da-Lite  
Model 5000 Portable




Da-Lite Lecterns  
Communications  
Cabinets and  
Credenzas



Da-Lite  
Project-O-Stands  
and Easels

80162 Rev. 12/01

*Operating Instructions  
For  
Model C  
with CSR  
(Controlled Screen  
Return)*

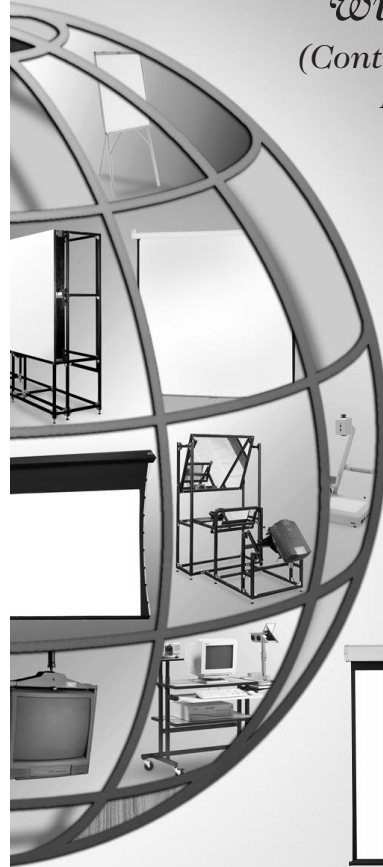


*The*  
**POWER** *In*  
**PRESENTATION PRODUCTS**

**DA-LITE**

**DA-LITE SCREEN COMPANY, INC.**

3100 North Detroit Street  
Post Office Box 137  
Warsaw, Indiana 46581-0137  
Phone: 574/267-8101  
800-622-3737  
Fax: 574/267-7804  
[http:// www.da-lite.com](http://www.da-lite.com)  
e-mail: [info@da-lite.com](mailto:info@da-lite.com)

Model C with CSR (Controlled Screen Return) is a feature offered exclusively by Da-Lite to assist the quiet controlled return of the screen into the case.

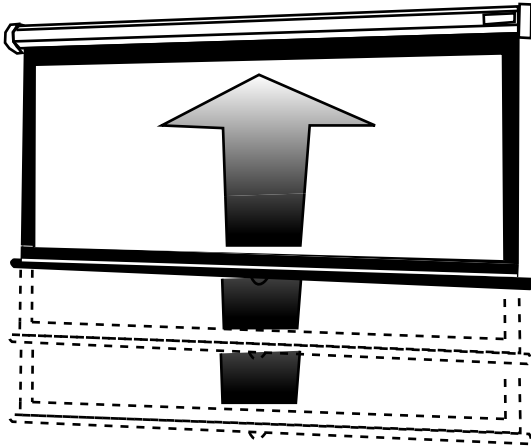

## YOU HAVE MADE A WISE SELECTION...

in choosing a Da-Lite projection screen, designed and engineered to produce the sharpest, most pleasing pictures with maximum convenience.

### **WALL MOUNTING**


1. Select fasteners of proper type for wall or ceiling involved.
2. Insert fasteners through proper openings provided in back side of end caps.
3. Attach screen securely to studding or other solid surface - never to plaster only.
4. **MAKE SURE SCREEN IS MOUNTED LEVEL.**

### **TO OPEN SCREEN**

Pull down on pull bail until desired picture area is obtained. Lock into position as on a window shade. Be sure surface is locked before releasing.

NOTE: This screen will not lock into position in the upper portion of its travel.

### **SUGGESTED METHODS OF INSTALLATION**



## CEILING MOUNTING

1. Heavy screw hooks may be installed into wood joists. Other types of hooks or chain may be used for other ceilings or for stage installations.
2. Insert hooks or chain through proper openings provided in sides of end caps. Screen must hang so that flat back of case is perpendicular to floor.
3. **MAKE SURE SCREEN IS MOUNTED LEVEL.**

## PRECISION SEAMING

Large screens will have one or more horizontal seams. Seams are standard and necessary in large size screens since surfaces are limited to the available fabric size.

Da-Lite Perma-Sealed seams are made by butting carefully matched edges of two panels together and fastening with special tape that is sealed to the reverse side. These seams are guaranteed not to separate. Seams in a picture surface should not be construed as patched or defective. In use, the seam will be virtually invisible in the projected picture.

## TO RE-ROLL YOUR PICTURE SURFACE

The Model C operates on the same principle as a window shade. Pull down about 6 inches to disengage the locking pawl and start the fabric up firmly and quickly.





Large picture surfaces are heavy and will start up too slowly to prevent the locking pawl from catching unless help is provided, so keep picture surface moving briskly.

Should the locking pawl catch, pull the picture surface down about 6 inches and start the surface up rapidly.

The CSR feature of this screen will allow the screen to stop, as normal, in the bottom portion of its travel. The screen will not stop in the top portion of its travel, but will continue slowly and gently into the case.

## PROTECT YOUR SCREEN


Before re-rolling surface into case, examine both front and back of surface to be sure they are free of foreign matter.




**MODEL C**  
**EXCLUSIVE FEATURES**

- Choice of Glass Beaded or Non-Gloss Matte White Picture Surfaces
- Easily Installed
- Multi-Purpose End Caps Form Sturdy Brackets for Wall/Ceiling Installation
- Aluminum Slat Saddle Distributes Uniform Tension on Picture Surface
- Heavy Duty Grooved Metal Roller Assures Permanent Fastening of Picture Surface
- Nylon and Ball Bearing Roller Mounting
- Handsome, Rugged, Enamel Steel Case
- Floor Stand Accessory  
(optional at extra cost)

**HANGING BRACKETS**  
**(Optional at extra cost)**



No. 11 Wall Bracket  
Non-Adjustable permits  
screen to extend 10" or  
14" from wall.



No. 6 Wall Bracket  
Non-Adjustable permits  
screen to extend 6"  
from wall.